

## APPLICATION




If contaminated, use a clay bar to clean. If paint correction is required, do so before application.



Wash and completely dry surfaces to be coated.



Clean the paint using a 50% IPA (isopropyl alcohol) to water mix in a trigger sprayer. Mist the paint then wipe down with a microfiber towel.




Wipe on coating by hand using a sponge or coating block, piece by piece. After wiping on wait 30-90 seconds to flash (depending on temp) then buff off with a microfiber towel.



Wait 20 minutes before driving, and 6 hours before getting wet.

# PRO

## CERAMIC NANO COATING

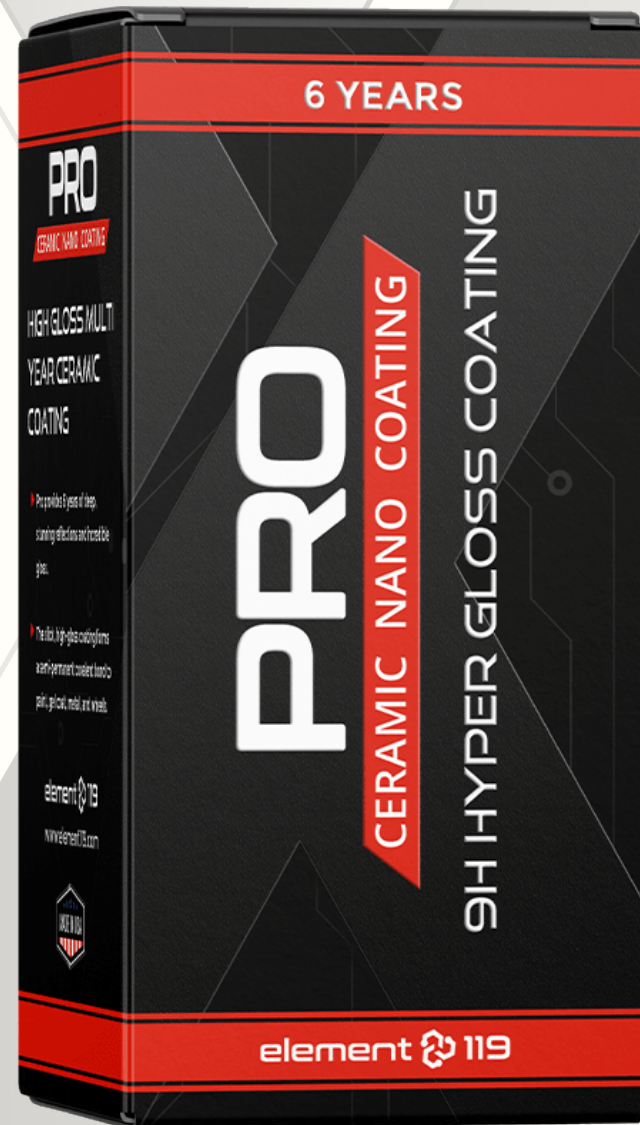

## PRODUCT OVERVIEW



System X Pro is an ultra-hydrophobic ceramic coating for automotive paint. Pro is a semi-permanent 9H self-cleaning coating with high gloss. Pro has passed rigorous Boeing approval testing and has been evaluated for hardness as well as alkali and salt resistance by SGS laboratory. This ensures Pro is 100% safe for your paint, adheres on a molecular level, and withstands tough environmental conditions. Pro has a **SIX YEAR WARRANTY** on automobiles when installed by an Accredited Installation Center and annual inspection requirements are met.

## TECHNICAL DATA

EFFECTIVENESS	6 years depending on environmental factors
PENCIL HARDNESS	9H
APPLICATION	By hand with sponge, coating block, or cotton applicator
BOTTLE SIZE	65mL, 275mL, 4L
SHELF TIME	18 months from shipment date when unopened and stored dry at 13°C (55°F) to 29°C (85°F)
APPEARANCE	Clear / High Gloss
FILM THICKNESS	0.2 mil
CHEM. RESISTANCE	Excellent
TEMP. RESISTANCE	> 760°C (1400°F)
SALT SPRAY	(ASTM B117) @ 35°C (95°F), 5% salt concentration, > 350 hrs to first signs of corrosion
ADHESION CROSS-CUT TAPE	(ASTM D3359) 5b (0%, none)
MANDREL BEND	(ASTM D522) 0% @ 180° rotation
IMPACT	(ASTM D2794) 80/80 in/lbs
COVERAGE	200 sq feet (18.6m <sup>2</sup> ) per 100mL
DRY TIME	20 minutes
CURE TIME	Initial cure in 4 hours, full cure in 3 days
UV PROTECTION	Yes

REGISTERS WITH

